
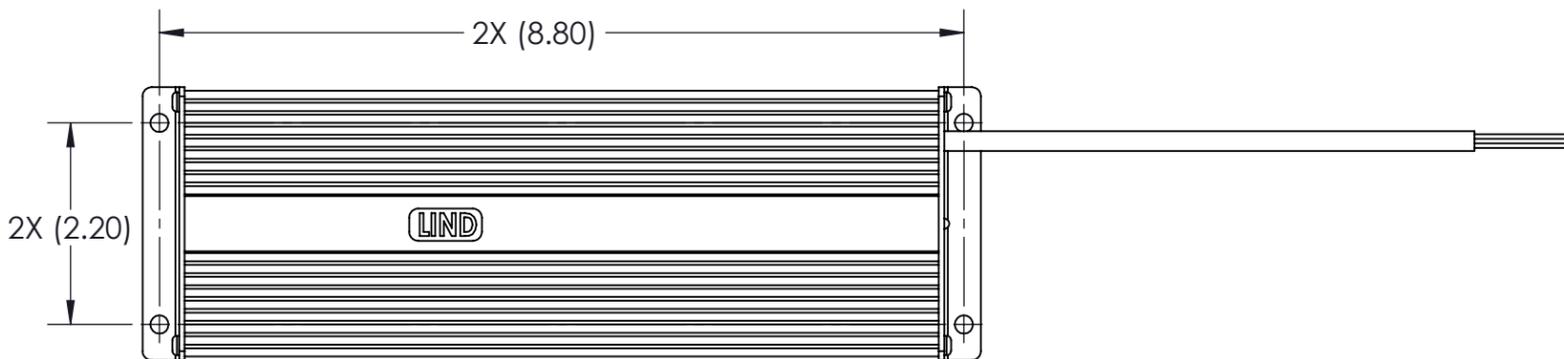


PRODUCT CONTENTS:

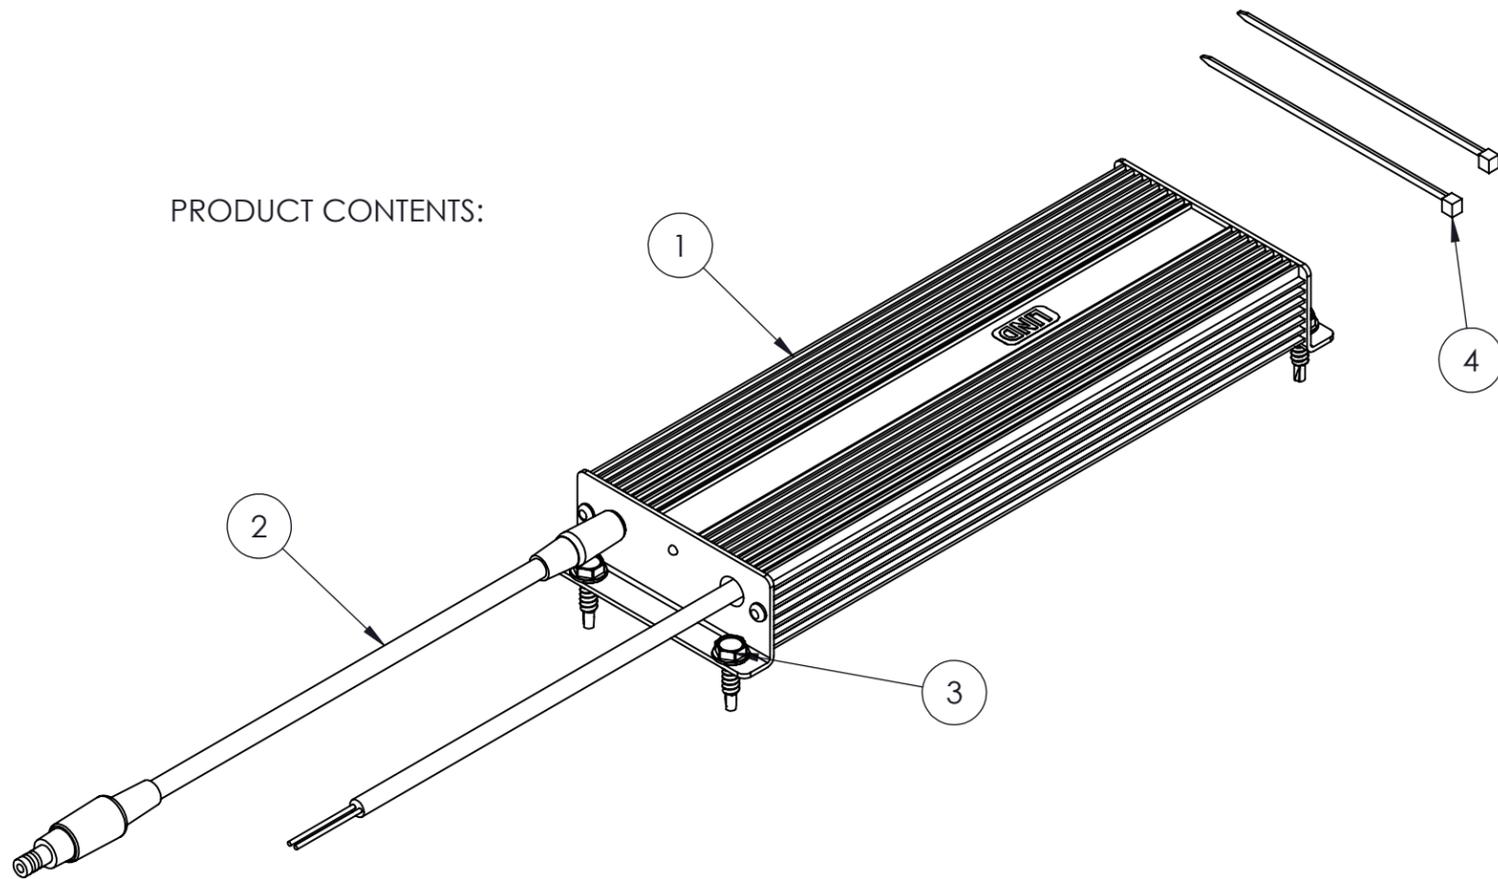

PANEL MOUNTING DIMENSIONS

# INSTALLATION INSTRUCTIONS:

## NOTES:

1. THIS PRODUCT IS DESIGNED SOLELY FOR USE WITH FORKLIFTS.
2. THE POWER SUPPLY CANNOT BE MOUNTED ON THE DOCKING STATION. SELECT A REMOTE MOUNTING LOCATION SUITED TO YOUR SPECIFIC INSTALLATION ENVIRONMENT.
3. POWER SUPPLY MUST BE MOUNTED TO ALLOW THE 36" OR 41" POWER CABLES TO BE PLUGGED INTO THE DOCKING STATION. BE CERTAIN TO PROVIDE AN ADEQUATE SERVICE LOOP SO AS NOT TO RESTRICT THE INTENDED FULL RANGE OF MOTION.
4. PROPERLY STRAIN RELIEVE CABLE USING STRAIN RELIEF ANCHOR POINTS ON DOCKING STATION AND ZIP TIES (ITEM #4) PROVIDED.

## INSTALLATION:

5. DETERMINE LOCATION FOR MOUNTING POWER SUPPLY BRICK (ITEM #1)
6. IF SHEETMETAL, USE 4X #10-16 X 3/4" LONG SELF-TAPPING SCREWS (ITEM #3) SUPPLIED IN HARDWARE KIT TO MOUNT POWER SUPPLY. NOTE: HEX DRIVE SIZE ON ITEM #3 IS 5/16".
7. USE THE APPROPRIATE TORQUE FOR THE #10-16 X 3/4" LONG SELF-TAPPING SCREWS FOR THE MATERIAL TYPE AND THICKNESS OF YOUR SPECIFIC INSTALLATION SURFACE. DO NOT OVERTIGHTEN FASTENERS.
8. IF YOU CHOOSE TO MOUNT THE POWER SUPPLY TO A SURFACE OTHER THAN SHEETMETAL, PLEASE SUBSTITUTE THE APPROPRIATE HARDWARE AND TORQUE ACCORDINGLY.
9. IF IT IS NECESSARY TO PRE-DRILL HOLES, THE REQUIRED DIMENSIONS ARE NOTED IN VIEW LABELED "PANEL MOUNTING DIMENSIONS". BE CERTAIN TO DRILL HOLES OF AN APPROPRIATE SIZE FOR THE FASTENER TYPE SELECTED.
10. ONCE POWER SUPPLY BRICK (ITEM #1) IS SECURELY MOUNTED, INPUT CABLE ATTACHED TO ITEM #1 CAN NOW BE CONNECTED TO AN APPROPRIATE 12V POWER SOURCE USING EXPOSED WIRES.
11. OUTPUT CABLE (ITEM #2) CAN NOW BE CONNECTED TO DOCKING STATION AND PROPERLY STRAIN RELIEVED USING ZIP TIES (ITEM #4) PROVIDED.
12. NOTE THAT GREEN INDICATOR LIGHT ON POWER SUPPLY WILL ILLUMINATE WHEN ALL CONNECTORS HAVE BEEN PROPERLY SECURED. FOR FURTHER INFORMATION, REFER TO LIND DOCUMENTATION SUPPLIED WITH THIS PRODUCT.

## KIT CONTENTS

ITEM #	DESCRIPTION	QTY.	FINISH	DRIVE STYLE/SIZE
1	LPS-118 THRU LPS-129 POWER SUPPLIES	1	BLACK	
2	36" OR 41" POWER OUTPUT CABLE	1	BLACK	
3	SELF-TAPPING SCREW, #10-16 X 3/4" LONG HEX WASHER HEAD	4	PLAIN	5/16" HEX
4	ZIP TIE, 0.09" W X 0.03" T X 4" L, 18# TENSILE	2	BLACK	

PRODUCT I.D. **LPS-118\_LPS-129** DATE **03-16-15**

PRODUCT NAME  
**INSTALLATION INSTRUCTIONS - LPS-118 THRU LPS-129**

**HAVIS**  
1-800-524-9900  
WWW.HAVIS.COM

WEIGHT: (LBS)  
**1.17**  
REV. DATE

**DRAWING NUMBER:**  
**LPS-118\_LPS-129\_INST\_3-15**

**WARNING:** ALL HAVIS INC. PRODUCTS ARE DESIGNED WITH SAFETY OF USE AND INSTALLATION IN MIND. HOWEVER, IT IS THE SOLE RESPONSIBILITY OF THE OWNER/OPERATOR OF A VEHICLE USING HAVIS INC. MOUNTING AND DOCKING EQUIPMENT, TO INSURE THAT THE EQUIPMENT IS INSTALLED SO THAT IT WILL NOT INTERFERE WITH VEHICLE OPERATION, INTERFERE WITH SAFETY DEVICES, OBSTRUCT VIEW OF DRIVING CONDITIONS, OR IN ANY WAY DEGRADE OCCUPANT SAFETY. IMPROPER INSTALLATION CAN CAUSE SERIOUS INJURY IN THE EVENT OF AN ACCIDENT. INSTALLATION SHOULD ONLY BE PERFORMED BY QUALIFIED PROFESSIONALS. COMPUTERS AND MOTION DEVICES MUST BE MOVED TO AND STOWED/SECURED IN THEIR SAFE DRIVING POSITIONS BEFORE OPERATING VEHICLE.

PRODUCT DESCRIPTION

**DC POWER ADAPTER WITH MOUNTING TABS AND INPUT CABLE ATTACHED FOR FORKLIFTS**